




IDEAL CERTIFIED  
COMBINED SECURITY  
FOR THE HOME OR  
OFFICE

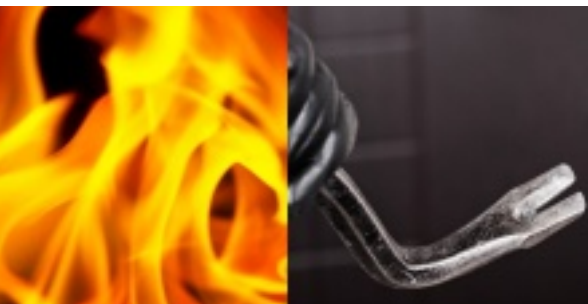

# SENATOR

COMBINED BURGLARY AND FIRE PROTECTION




## KEY FEATURES

- Dual Certification: Burglary (EN 1143-1) Grade I and Fire (EN 15659, LFS 30P).
- Certified locks: EN 1300 certified Class B high-security S&G Spartan electronic lock.
- \$45,000 Cash Rating.
- Four sizes available: 32, 46, 63 or 190 litres.
- Secure bolt work and traditional heavy weight design.
- Enhanced design: removable door for easy installation and a reduced overall weight by 15%.
- Fittings: each safe is supplied with one shelf as standard.
- Attractive appearance: single-colour door and body in dark grey (RAL 7016).
- Ideal for the home or office.

# SENATOR

## PRODUCT SPECIFICATIONS

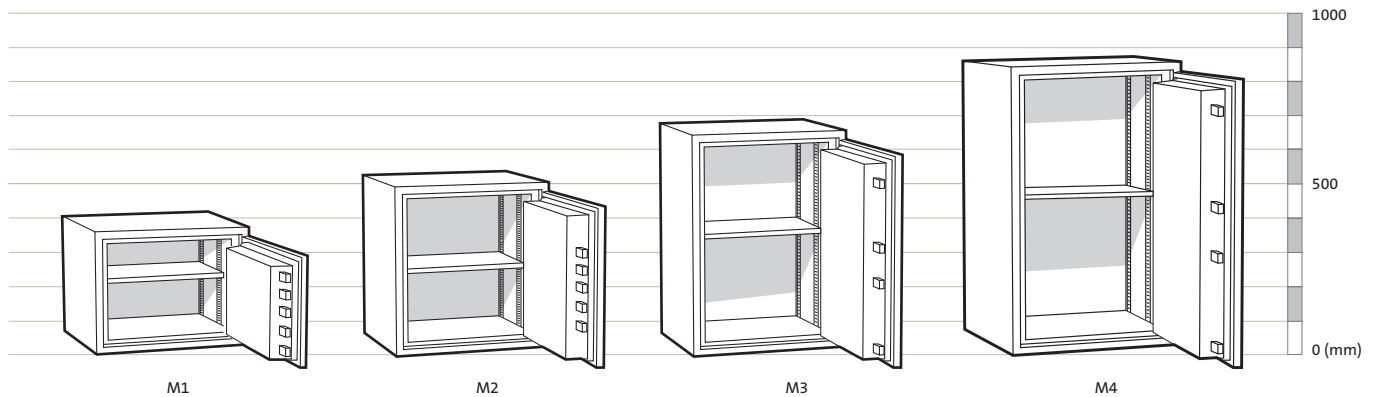

Model	External height (mm)	External width (mm)	External depth (mm)*	Internal height (mm)	Internal width (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)	Clear Opening Width	No. of bolts
M1	370	500	403	290	420	263	32	119	404	5
M2	500	500	403	420	420	263	46	146	404	5
M3	650	500	403	570	420	263	63	178	404	4
M4	862	654	563	782	574	423	190	326	558	4

\* + 55,27mm (handle protrudes from the surface)

### FITTED WITH S&G SPARTAN ELECTRONIC LOCK



The high-security electronic lock is operational with a six digit personal code. The lock is certified by ECB•S in accordance with European Standard EN 1300. Battery is located in the keypad itself and can be easily changed should the existing battery run down whilst the safe is closed.

### GRADE 1 PROTECTION IN FOUADD MODULER SIZES

A variety of sizes, ranging from 32 to 190 litres, meets every storage and capacity need. The safe has been cash rated upto \$45,000.

### A PRACTICAL, OFF-THE-SHELF SOLUTION

The Chubb safes Senator range is ready-to-use on delivery and can be fixed to the floor, as the required bolts are included. For installation in locations with stairs, the door can be easily removed, which reduces the safe's overall weight by approximately 15%. The stylish dark grey colour provides an attractive appearance while the lever handle enhances user comfort.

### DUAL-CERTIFIED PROTECTION



The Chubb safes Senator range has been certified EN 1143-1 in burglary resistance for Grade I and EN 15659, LFS 30P for up to 30 minutes of fire resistance by the European Certification Board of Security (ECB•S).

### CUSTOMIZATION

Each safe is supplied with one shelf as standard. Additional spares, handles & key escutcheons can be ordered.

### CONSTRUCTION

The body of the safe is prepared with a hole for base fixing with a M16 expansion bolt. The overall wall thickness is 40 mm comprising an inner and outer steel skins containing CEN-L concrete. The Safe door thickness is 99 mm comprising a 6mm (\*there are 3 metal sheets each 2.0 mm thick outer skin, 3.0 mm thick inner door and a 1.0 mm thick door back panel), 35mm of CEN-L concrete and boltwork. The door is removable and adjustable.

Toll Free Phone: 1800 450 777

[www.chubbsafes.com.au](http://www.chubbsafes.com.au)